... Weboost

Office 100

SKU: 50 Ohm: 652060 75 Ohm: 653060

MSRP: \$1,649.99

FEATURES

- · Ideal amplifier system for small businesses and warehouses
- Covers 8,000 to 25,000 square feet
- Includes LED indicators
- Is ISED approved and works on all Canadian carriers, including Rogers, Telus, Bell, and more





Kit Includes

652060 50 Ohm Kit	Office 100 Amplifier	Omni Plus Antenna 314422	Inside Dome Antenna 304412	Lightning Surge Protector 859902	2ft Low-Loss Wilson400 Cable 952302	60ft Low-Loss Wilson400 Cable 952360	75ft Low-Loss Wilson400 Cable 952375
653060 75 Ohm Kit	Office 100 Amplifier	Omni Plus Antenna 314423	Inside Dome Antenna 304419	Lightning Surge Protector 859992	2ft Low-Loss RG11 Cable 951127	60ft Low-Loss RG11 Cable 951160	75ft Low-Loss RG11 Cable 951175

About


weBoost Office 100 is an ideal amplifier solution for small businesses and warehouses up to 25,000 square feet. With Office 100, anyone who walks into the business will enjoy fewer dropped calls, uninterrupted texts, better voice quality, improved hotspot capability, faster internet speeds, better streaming, and more. All components needed for do-ityourself installation are included. Office 100 is 5G compatible and improves cell signal on all Canadian carriers, including Rogers, Telus, Bell, and more. Office 100 comes with an industry-leading 3-year manufacturer's warranty and a 30-day money-back guarantee.

Specifications

SKU NUMBER	652060 / 653060			
FREQUENCIES	Band 12/17	700 MHz		
	Band 13	700 MHz		
	Band 5	850 MHz		
	Band 4	1700/2100 MHz		
	Band 25/2	1900 MHz		
MAX GAIN	72 dB			
MAX UPLINK POWER	24 dBm			
MAX DOWNLINK POWER	12 dBm			
IMPEDANCE	50 Ohm / 75 Ohm			
POWER	110-240V AC, 50-60 Hz, 20 W			
CONNECTORS	N-Female / F-Female			
BOOSTER DIMENSIONS	6 x 6 x 1.8 in			
BOOSTER WEIGHT	1.9 lbs			



How It Works

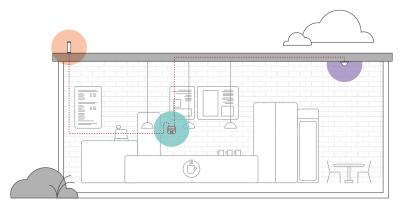

Outside antenna: The outside antenna communicates back and forth with nearby cell towers.

Booster: The booster amplifies any cell signals it receives from the outside antenna.

3 Inside antenna: The inside antenna broadcasts these signals for use throughout your business.

Package Dimensions



Support

652060 • 653060_Office100_SS_062821