

Drive Reach Fleet

SKU: 650254

MSRP: \$749.99

FEATURES

- · Enhances all available wireless network signals and speeds throughout a fleet vehicle (Police, Work, Service and Delivery vehicles).
- · Boosts signal strength for cellular-based fleet tracking devices allowing fleet managers to better track vehicles, even in weak signal areas.
- Works with ALL cellular devices in the vehicle on ALL carriers simultaneously.
- · Increases cellular range, provides fastest available data speeds and improves call quality.
- REQUIRES PROFESSIONAL INSTALLATION.

Kit Includes







Drive Reach

4G NMO Antenna (314405)

6 ft RG58 extension cable



Antenna (314419)

O-ring sealant

Hardwire Power

Supply (850022)



3/4	inc	h I	NMC	C	Mount w/
14	ft.	ca	ble	(9	904423)

About

The Drive Reach Fleet is weBoost's most powerful, in-vehicle cell signal booster yet. Designed for use in law enforcement, government, or commercial fleet vehicles, Drive Reach Fleet delivers a game-changing level of uplink output power—up to 29.5 dBm.

With this 5 dB increase in signal output, Drive Reach Fleet effortlessly provides your team with the enhanced signal strength needed to communicate and stay connected when it matters most. The Drive Reach Fleet boosts voice and data signal for multiple users and cellular-connected devices simultaneously within the fleet vehicle. This kit uses a high-performance NMO antenna, which REQUIRES PROFESSIONAL INSTALLATION. The Drive Reach Fleet enhances all available wireless network signals and speeds with 50 dB system gain—the maximum allowed by the IC. Drive Reach Fleet is compatible with all major Canadian mobile carriers. Like all weBoost products, the Drive Reach Fleet features a 2-year warranty along with a 30-day money back guarantee.

Specifications


MODEL NUMBER	650254			
FREQUENCIES	Band 12/17	700 MHz		
	Band 13	700 MHz		
	Band 5	850 MHz		
	Band 4	1700/2100 MHz		
	Band 25*/2	1900 MHz		
MAX GAIN	50 dB			
IMPEDANCE	50 Ohm			
POWER	5V/ 4.5A			
CONNECTORS	SMB			
BOOSTER DIMENSIONS	6 x 4.5 x 1.5 in			
BOOSTER WEIGHT	1.80 lbs			

*New frequency band utilized by Drive Reach.





Installation

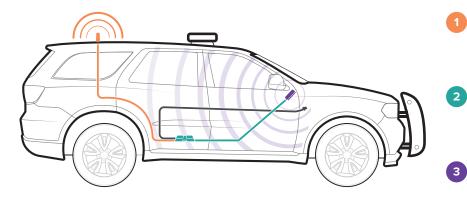

Receives signal: The powerful antenna reaches out to access all cellular voice and data, including 4G LTE and 3G, and delivers it to the booster.

Boost signal: The booster receives the signal, amplifies it, and serves as a relay between your phone and the nearest cell tower.

Broadcasts signal: Your devices get a stronger signal, and calls and data are fed through the booster back to the network.


Available Accessories




NMO Soft Install Bundle 900037

Package Dimensions

10 L x 10 W x 3 H



MASTER CARTON: 36 L x 17 W x 13 H I 51.1 lbs. I QTY 13

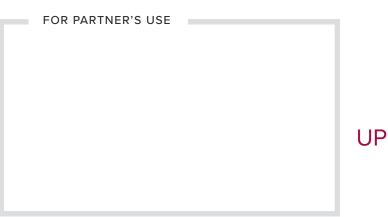

Support



2-Year Warranty from Purchase.

Website: www.weboost.ca/support

Phone: +1 866 294 1660 Monday to Saturday

UPC



650254_drivereachfleet_canada_SS_052819